

# 2200 & 3200 Series Vacuum Belt Conveyors

**DORNER**<sup>®</sup>  
By Columbus McKinnon

*Combining belt technology with engineered vacuum pumps to provide the optimum results!*

Vacuum conveyors are made by perforating the belt and drawing air through grooves in the bed of a standard conveyor.

- Hold flat parts of any material fast to the belt
- Ideal for elevation changes or part holding
- Can be used in upside down applications

## FEATURES & SPECIFICATIONS

- Available on Dorner 2200 & 3200 Series belt conveyors
- Aluminum extruded frame with T-Slot construction
- Sealed ball bearings
- Rack and pinion belt tensioning
- End and center drive compatible
- Vacuum source is provided by a regenerative vacuum blower
- Reference the conveyor specification sheet or [www.dornerconveyors.com](http://www.dornerconveyors.com) for additional details and specifications

## BELTING


- Standard belting is recommended
- V-Guided and Non V-Guided belt compatible
- Friction belting is available for rigid parts like plastic caps, plastic bottles, ceramic wafers, glass ware, etc.
- Electrically conductive belting is available for thin product like paper, light cardboard, cloth, plastic film, etc.
- Note: Belt must be finger spliced

## OPTIONS & ACCESSORIES

- Standard support stands are available
- Product guiding is generally not required or recommended
- All standard 2200 & 3200 Series mounting packages and gearmotors are available



Can be Used with a Variety of Vacuum Sources

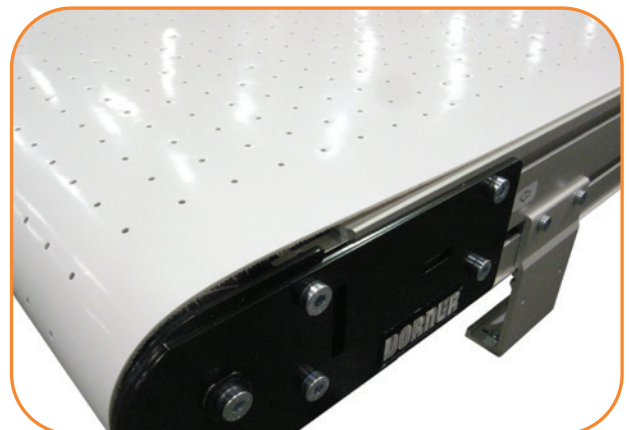

The Vacuum Area is Designed Custom for Each Application

## TRANSFORMING CONVEYOR AUTOMATION

**Dorner – North & South America**

[www.dornerconveyors.com](http://www.dornerconveyors.com)

**Dorner Mfg. Corp.**  
(262) 367-7600  
[info@dorner.com](mailto:info@dorner.com)

**Dorner Conveyors Ltd.**  
(289) 208-7306  
[info@dorner.com](mailto:info@dorner.com)

**Dorner Latin America, S. de R.L. de C.V.**  
+52.33.30037400  
[info.latinamerica@dorner.com](mailto:info.latinamerica@dorner.com)

Online Configurator

**Tools**

